


SPARE PARTS LIST

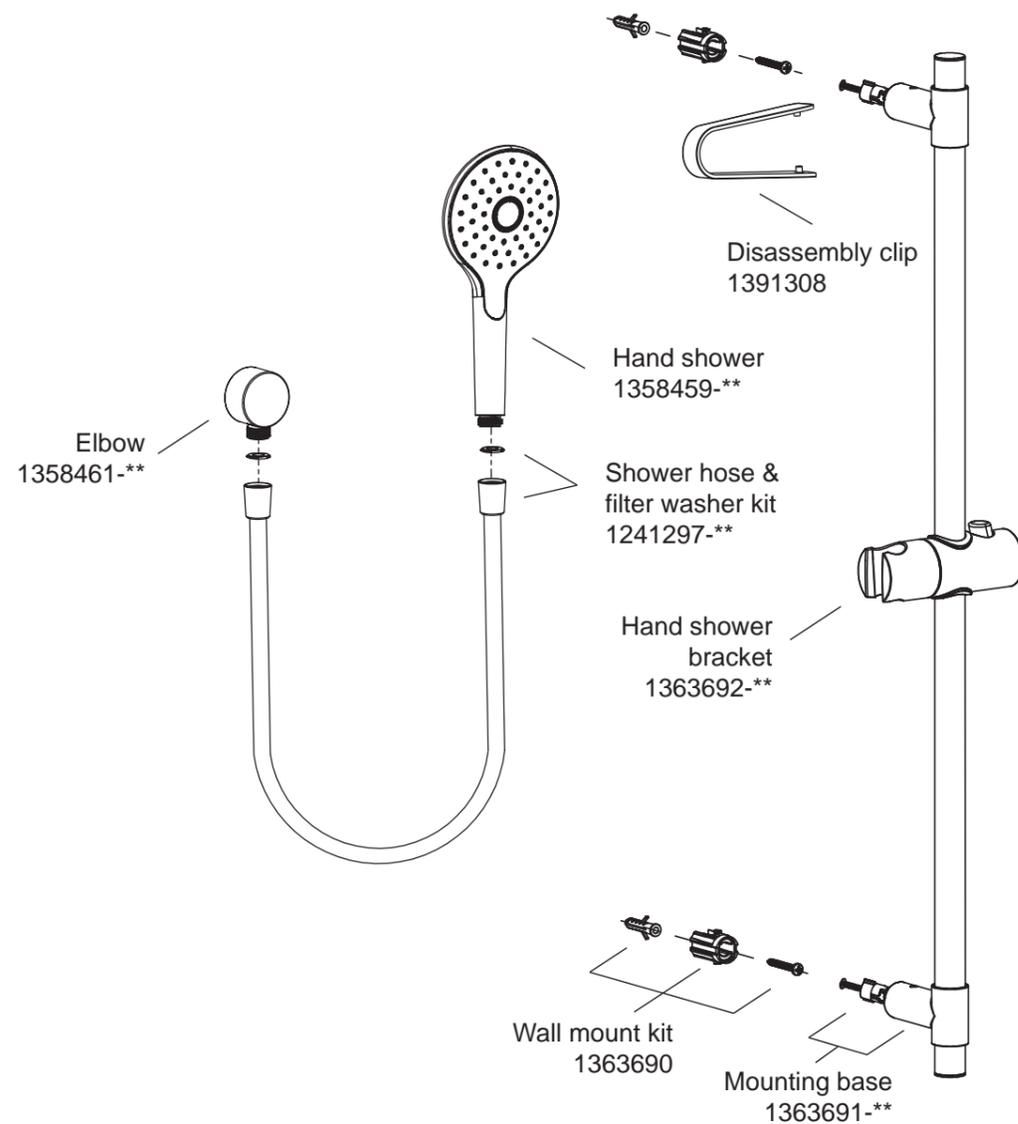

** Colour code must be specified when ordering

-CP (Polished chrome)
-BN (Brushed nickel)
-BL (Matte black)

CONTACT AND WARRANTY INFORMATION

NEW ZEALAND
KOHLER NZ LTD

Free Ph: 0800 100 382
Free Fax: 0800 664 488
www.Englefield.co.nz

AUSTRALIA
KOHLER CO.

Free Ph: 1 800 ENGLEFIELD
(1 800 364 533)
www.Englefield.com



For warranty information, please visit our website

INSTALLATION INSTRUCTIONS



TAPWARE

STUDIO STUDIO PIN SLIDE SHOWER 29689A



BEFORE YOU BEGIN


All information is based on the latest product information available at the time of publication. Englefield reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please leave this installation instructions guide for the consumer. It contain important information.

NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. An in-line filter must be used with this product.
3. The working pressure of handshower is between 100 kPa and 500 kPa. If it exceeds 500 kPa, a pressure limiting valve must be fitted.
4. The operating temperature of handshower is from 10° to 70°. NZ building code G12 requires that maximum hot water temperature at any sanitary fixture used for personal hygiene shall not exceed either 45° or 55°. If so, a tempering valve must be installed.
5. This shower is intended for high/mains pressure installations. It may not be suitable for use with gravity-fed water heaters, low and unequal pressure supplies.
6. All installations should comply with local plumbing codes and the relevant requirements of AS/NZS 3500 and AS/NZS 6400.


ROUGH-IN DIMENSIONS

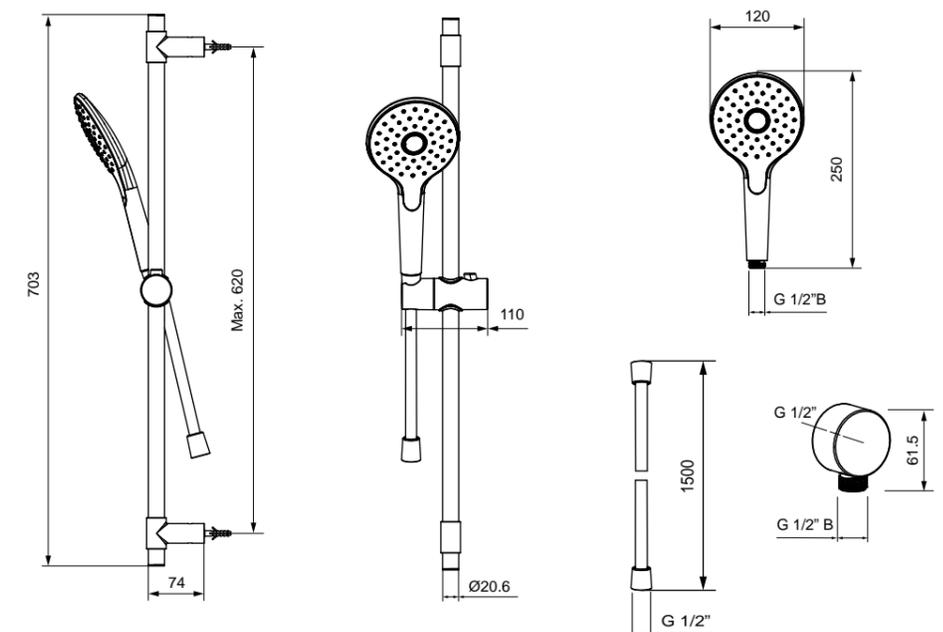

INSTALLATION

How to Install the Slide Rail


- Determine a suitable position on the finished wall for the slide rail, avoiding cables and pipes buried in the wall.
Note: It is recommended that the slide rail is fixed to timber studs or noggs in the wall.
- Mark the position of top & bottom wall fixing holes on the finished wall (Max. 620 mm apart) and then drill 2 x Ø6mm holes.
- Fix brackets (2) to the finished wall with screws (3).
Note: Ensure the bracket (2) is positioned so the those two round clips are aligned vertically.
- Move the hand shower bracket (7) to the centre of the rail.
- Adjust the position of mounting bases (5) on the rail at both ends by loosening the screw (4) inside the mounting base to ensure the distance between them (Max. 620mm apart) is same as one between those two wall fixing holes.
- Mount the rail onto the brackets (2). Ensure that those two round clips are clicked completely into the holes in the mounting bases.
Disassemble the rail from the wall with supplied tool (8).

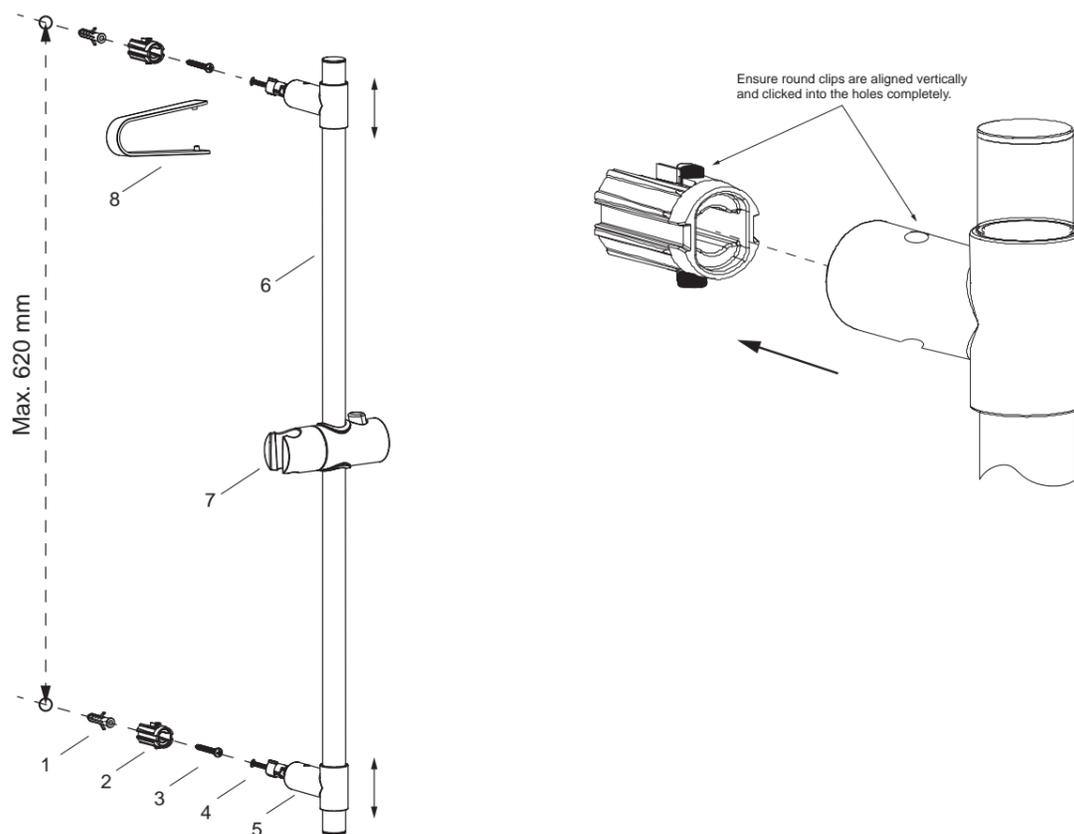

How to Install the Elbow and Hand Shower

Note: To perform installation the installer must provide a G1/2" B water supply nipple (8). The distance from the end of the nipple to the finished wall surface should be between 10mm and 13mm and be perpendicular to the finished wall.

- Apply thread tape or sealant to the water supply nipple.
- Fit the O-ring (9) into groove in the base of elbow (10) and then screw it onto the water supply nipple clockwise until the back surface of the elbow touches the wall.
- Ensure the outlet of the elbow faces down. Otherwise, loosen the elbow and redo from step 1).
- Insert the rubber filter washers (11) in both ends of shower hose (12). Connect and hand tighten the shower hose to the hand shower (13) and the elbow.

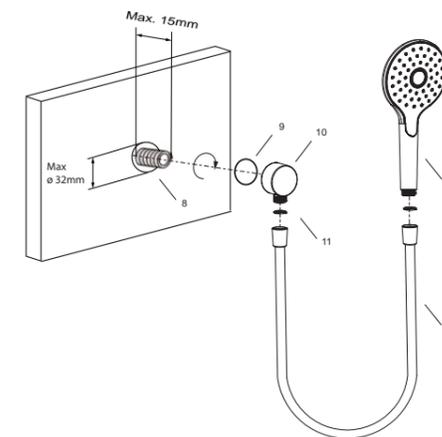

INSTALLATION CHECKOUT

- Ensure that all connections are tight.
- Turn on the main water supply and check for leaks. Repair as needed.
- Disconnect the hand shower from the shower hose and then turn on the shower mixer for minimum one minute to flush any residual debris from the line.
- Check and clean filter washers as necessary. Reinstall the shower hose back to the hand shower and the elbow.
- Adjust the height of hand shower by pressing the bracket button & sliding it up or down.

CLEANING INSTRUCTIONS

Clean all finishes with mild soap and warm water. Wipe entire surface completely dry with a clean soft cloth. Many cleaners may contain such chemicals as ammonia, chlorine, toilet chemicals etc, which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Englefield fittings.